


Dehumidifier DehuTech 2000

Desiccant dehumidifier for drying air at all conditions, but specially suitable for low temperature and low humidity operation.

Complete self-contained unit including desiccant rotor, fans, filters, reactivation heater and controls. Insulated casing in stainless steel.

The unit is ready for connection to standard size duct works, electrical power supply and external humidity sensor

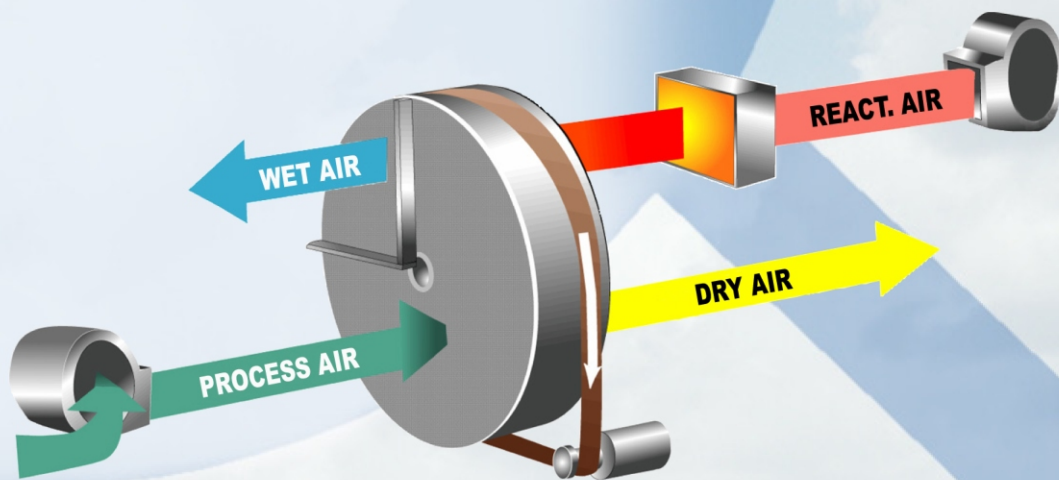


technical data from

DehuTech

Dehumidifier DehuTech 2000

CAPACITY DIAGRAM

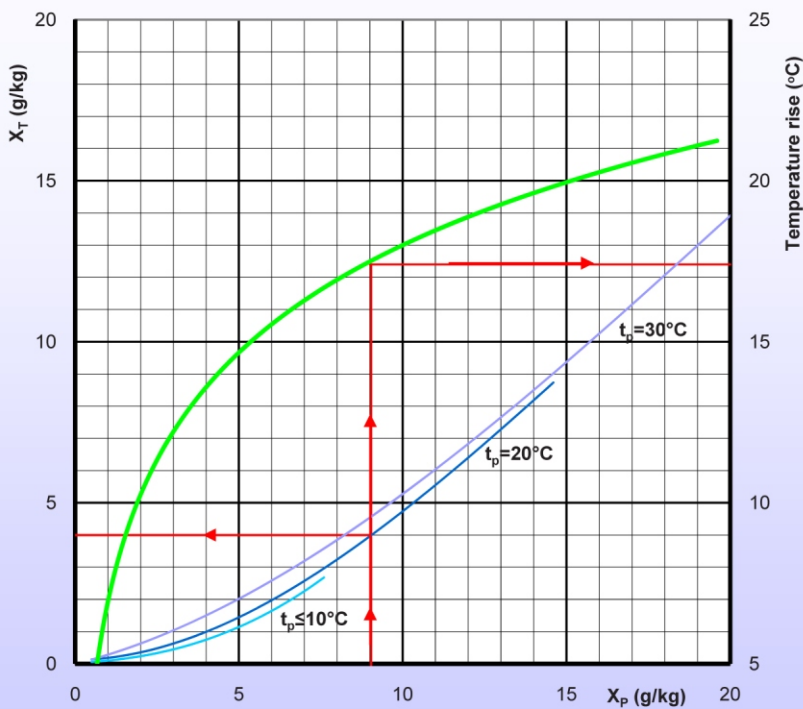


EXAMPLE:

Process air: $x_p = 9,0$ g/kg, $t_p = +20^\circ\text{C}$ giving
 Dry air: $x_T = 4$ g/kg, $t_T = 20 + 17,4 = 37,4^\circ\text{C}$

TECHNICAL DATA:

Dehumidification capacity (at $+20^\circ\text{C}$ and 60% RH. See capacity diagram for other data)	11,9 kg/h
Dry air flow (at 260 Pa available external pressure)	2000 m ³ /h
Wet air flow (at 150 Pa available external pressure)	500 m ³ /h
Power supply (3x400 V, 50 Hz)	20 kW
Weight	180 kg
Max noise level	71 dB(A)

DIMENSIONS

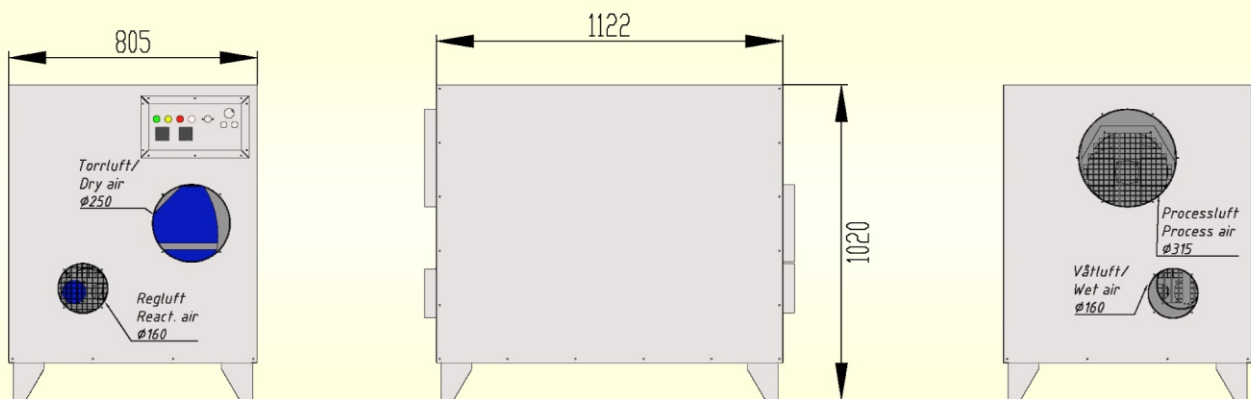

Manufacturer:



Enhagsslingan 23, S-187 40 TÄBY, Sweden
 Phone +46 8 792 04 08 Fax +46 8 792 55 59
 E-mail: info@dehutech.com Web site: www.dehutech.com

COND AIR
 TELPU MIKROKLIMATA RISINĀJUMI

Vārmu iela 7 • Rīga • LV-1009 • Latvija
 T.+371 28346447 • F.+371 66100122
condair@condair.lv • www.condair.lv